


SPECIAL EFFECT NEON POWER SUPPLY

SFX-7000, Rev 1.1, 1/25

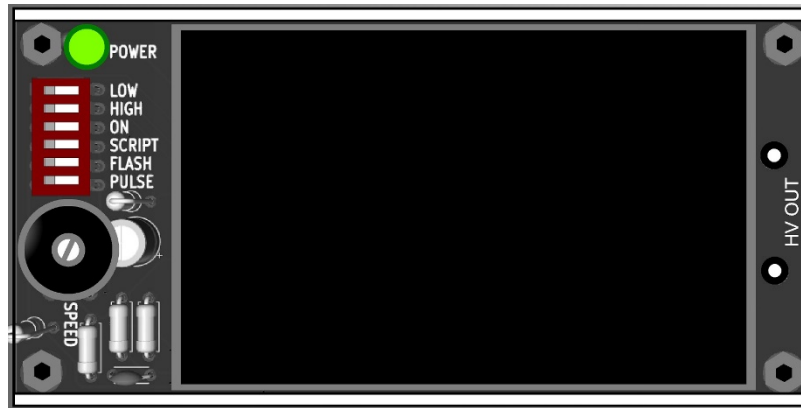

This power supply is designed for 2 electrode traditional neon units. Using the small DIP switches located on the power supply, you can select 1 of 4 different operating modes, FLASHING, SCRIPTING, PULSING and STEADY. The rate/ speed of the effect is adjusted with the speed knob located next to the DIP switches as well as a low/high range selected by the DIP switches.

INPUT

- 12 to 15 VDC
- RED + / Black - (supplied 12 inch wire leads)
- 3 AMP MAX

DIMENSIONS

- 4.125 x 2.125 x 1.250 inches (105 x 54 x 29 mm)
- 7 oz (200 g)

CONTROL

- ONBOARD (SPEED KNOB and DIP SWITCHES)

OUTPUT

- 10,000 VAC MAX. (output voltage will vary depending on load)
- 8 MA MAX.
- 14 inch 18awg leads



**Proudly made in the
USA**

NOTE

Only one speed range should be selected at any time, either LOW or HIGH. Only one effect should be selected at any time, ON, SCRIPT or FLASH. For the PULSE effect, select SCRIPT and PULSE together.

WARNING

This power supply produces high voltage which can be hazardous and should only be installed by qualified individuals. Users assume all liabilities. Lumalaser, inc. makes no claims regarding fitness for any specific installation.